



**Skyfol**<sup>®</sup>  
Film Solutions

**PPF**Wrap Cast  
paint protection film

Skyfol has expanded the palette of coloured paint protection films. Experience the ultimate fusion of efficient protection, extra durability and style with our high-end wraps that elevate film installation to a new level. **Skyfol PPF Wrap Cast** not only protects the vehicle against damages but also provides a perfect glossy colour with a stunning appearance that turns heads wherever you drive the car. The PPF Wrap Cast is a highly flexible, easily installable colored paint protection film series, available from stock with a vast range of colors.



**Real PPF  
level protection**



**More durable than  
PVC car wrap films**



**Self-healing feature**



**Easily accessible  
from stock**



**Perfect gloss  
surface**




**Unique style**

## RAW MATERIAL:

Skyfol PPF Wrap is a biodegradable, polyester-based aliphatic thermo polyurethane film. As it is resistant to orange peel, yellowing and UV, it is widely used for the exterior surface protection of vehicles.

## STRUCTURE OF THE FILM:

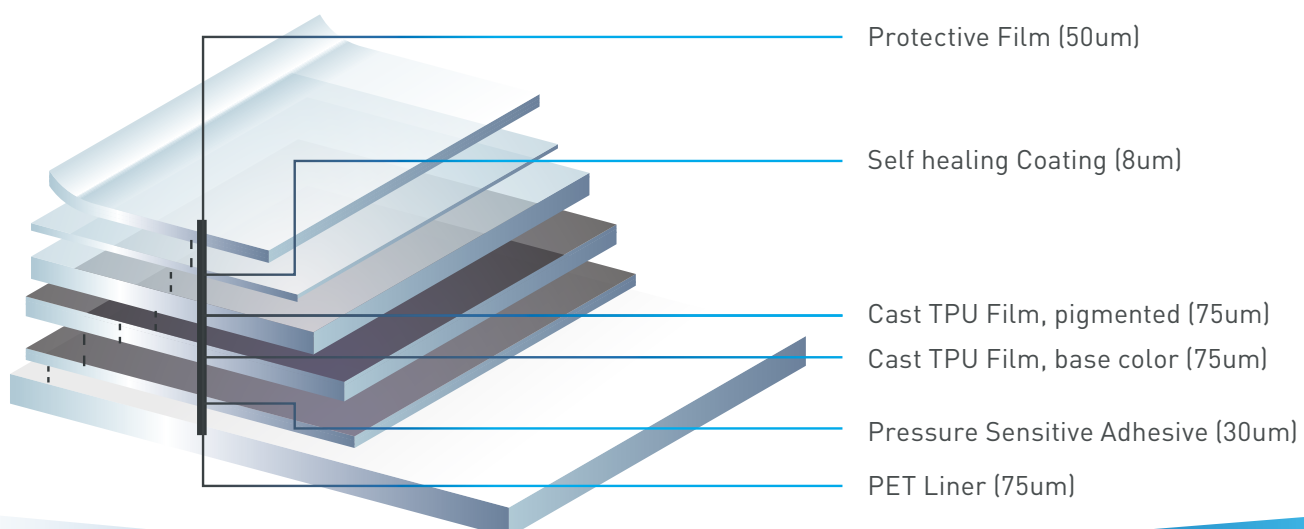



**Skyfol**<sup>®</sup>  
Film Solutions

**PPF**Wrap Cast  
paint protection film

## TECHNICAL FEATURES:

<b>Thickness:</b>	200 micron
<b>Gloss value:</b>	> 90
<b>Elongation at break:</b>	>300
<b>Adhesive:</b>	Removable, repositionable, non-yellowing acrylic adhesive.
<b>Adhesive initial tack:</b>	$16 \leq F \leq 26$
<b>Adhesive holding tack:</b>	$20 \leq F \leq 30$
<b>Resistance:</b>	The film is resistant to general-use automotive fuels.
<b>Shelf life:</b>	1 year, stored optimally at 22°C and with relative humidity 50%.

### TECHNICAL SPECIFICATIONS:

technical data, recommendations, and other statements contained in this document are based on tests and experimental data that we believe to be reliable but whose accuracy and completeness are not guaranteed.

### PRODUCT USE:

in actual use, many of the factors beyond the control of Skyfol can affect the performance of the product. Due to the diversity of factors affecting product performance, it is entirely the responsibility of the user to make sure that the film is suitable for the actual use.

### PRODUCT SAFETY:

the product is a urethane film with residual solvent odour, but it does not release hazardous chemicals under normal use.

### LIMITATION OF LIABILITY:

with the exception of statutory prohibitions, Skyfol shall not be held liable for any direct, indirect, special or incidental loss or damage related to the Skyfol product, regardless of any legal, statutory (warranty, contract), negligence or objective liability.

## WARRANTY:

The installer assumes a 5-to-7-year warranty on the installation depending on the geographical location of the use of the vehicle. In Europe and the USA, a 7-year warranty, in the Middle East a 5-year warranty is granted. The warranty applies to the film getting detached from the surface due to adhesive failure, cracking, bubbling and yellowing. The warranty period begins on the date of the invoice issued for the installation. The warranty applies only if installation is carried out on the original factory paintwork. The warranty is non-transferable and applies only to the original customer.

In case of problems due to material defects, Skyfol undertakes to replace the material. The value of the claim shall not exceed the gross purchase price indicated on the invoice for the sale of the product. The warranty does not cover damage caused by improper use, accidents, improper installation and normal wear and tear of the product, neither dents caused by stones and road debris. The paint protection film can be ordered from official Skyfol distributors published at [www.skyfol.com](http://www.skyfol.com). Always consult the relevant Skyfol representatives who will inform you about roll sizes, minimum order quantities, prices and other business terms.

## CONTACT:

For the selection of the material and to receive technical assistance for application, visit our website at [www.skyfol.com](http://www.skyfol.com)